

SURFACE TREATMENT FOR ALL KINDS OF WOODEN FLOORS



PROFESSIONAL
SERIES FROM
FLOORCOAT A/S



FLOORCOAT

SURFACE TREATMENT:

PRIMERLINEPAGE 2

EASYLINEPAGE 3

PROLINEPAGE 4

HIGHLINEPAGE 6

SPORTSLINEPAGE 8

**INDOOR CLIMATE
CERTIFICATES**PAGE 10

FLOORCOAT LACKPAGE 12

FLOORCOAT OILPAGE 16

FLOORCOAT SOAPPAGE 18

FLOORCOAT LYEPAGE 20

FLOORCOAT WAX & LYEPAGE 22

Here you'll find us:

DENMARK/Odense

TIP TOP Slibematerialer A/S
Egestubben 4 C & D
5270 Odense N – Danmark
T. +45 66 18 03 06
info@floorcoat.dk

DENMARK/Århus

TIP TOP Slibematerialer A/S
Egsagervej 8
8230 Åbyhøj – Danmark
T. +45 86 12 13 66
info@floorcoat.dk

NORWAY

TIP TOP Slipematerialer AS
Norge Henting av varer Oslo:
Jims Lagerutsalg
Brokekkveien 1028
0582 Oslo - Norge
T. +47 22 65 45 43
info@floorcoat.no

NETHERLANDS

TIP TOP Schuurmaterialen B.V.
Kollergang 15A/B
7773 NG Hardenberg - Netherlands
T. +31 6 1312 6929
info@floorcoat.nl

SWEDEN

Floorcoat Sverige AB
Industrigatan 25
234 35 Lomma
+46 (0) 40 29 33 10
info@floorcoat.se

GERMANY

Floorcoat A/S
Egestubben 4 C & D
5270 Odense N
Contact: Bo Blak Abildgaard
T. +45 28 11 64 70
info@floorcoat.dk

www.floorcoat.eu

FLOORCOAT

SURFACE- TREATMENT



Floorcoat A/S is a manufacturing company that, for more than 20 years, has exclusively produced quality products for professional surface treatment.

Floorcoat A/S focuses on quality, environmentally friendly products and approvals.

IKONS

These tools will be used for the product



Paintbrush



Roller



Spreader



Broom



Sanding



Machine



Mop






Floor Cloth
Scrubber

PRIMER LINE

EASY LINE






PRIMER-LINE FC26 XL

Application	Floorcoat FC26 XL is a water-based primer with an extra high solids content, for coating of wooden parquet, board and plank floors.
Volume	5 liter
Binder type	Polyurethane/Acrylic
Coverage	Approx. 10m ² /liter
Number of treatments	1
Floor temperature	15-25°
Drying time	Approx. 1-2 hours, 20°
Recommended tool	  






EASY-LINE FC47 MATT/SILK

Application	Floorcoat FC47 is a water-based coating for finishing of parquet and wooden parquet, board- and plank floors, where standard and middle levels of resistance etc. are required. FC47 retains the light and natural look of the wooden floor. FC47 is available in Matt and Silk.
Volume	Matt 5 & 10 liter Silk 5 liter
Binder type	Polyurethane/Acrylic
Coverage	Approx. 10m ² /liter
Number of treatments	2-3
Floor temperature	15-25°
Drying time	Approx. 1-2 hours, 20°
Recommended tool	  






EASY-LINE FC48 MATT

Application	Floorcoat FC48 is a water-based coating for finishing of parquet and wooden parquet, board- and plank floors, where standard and middle levels of resistance etc. are required. FC48 gives the wooden floor a warm look and depth.
Volume	5 liter
Binder type	Polyurethane/Acrylic
Coverage	Approx. 10m ² /liter
Number of treatments	2-3
Floor temperature	15-25°
Drying time	Approx. 1-2 hours, 20°
Recommended tool	  




PROLINE






PRO-LINE FC61 MATT

Application	Is a water based coating for finishing of parquet and wooden parquet, board- and plank floors, where a middle to high levels of resistance, etc. are required. It is recommended to prime the floor using a Floorcoat primer.
Volume	5 liter
Binder type	Polyurethane
Coverage	8-10m ² /liter
Number of treatments	2-3
Floor temperature	15-25°
Drying time	Approx. 1-2 hours, 20°
Recommended tool	  




PRO-LINE FC62 MATT/SILK

Application	Is a water based coating for finishing of parquet and wooden parquet, board- and plank floors, where a high levels of resistance, etc. are required. It is recommended to prime the floor using a Floorcoat primer.
Volume	5 liter
Binder type	Polyurethane
Coverage	8-10m ² /liter
Number of treatments	2-3
Floor temperature	15-25°
Drying time	Approx. 1-2 hours, 20°
Recommended tool	  

PRO-LINE FC66 MATT

Application	Is a water based coating with an extra high solids content for finishing of parquet and wooden parquet, board- and plank floors, where high levels of resistance, etc. are required. It is recommended to prime the floor using a Floorcoat primer.
Volume	5 liter
Binder type	Polyurethane/Acrylic
Coverage	8-10m ² /liter
Number of treatments	2-3
Floor temperature	15-25°
Drying time	Approx. 1-2 hours, 20°
Recommended tool	  




PRO-LINE FC65 2K MATT INCL. HARDENER

Application	Is a water based 2-component coating for finishing of parquet and wooden parquet, board- and plank floors, where extra high levels of resistance, etc. are required. It is recommended to prime the floor using a Floorcoat primer
Volume	5 liter incl. Hardener
Binder type	Polyurethane/Acrylic
Coverage	8-10m ² /liter
Number of treatments	2-3
Floor temperature	15-25°
Drying time	Approx. 1-2 hours, 20°
Recommended tool	  

HIGHLINE






HIGH-LINE FC82 2K SILVER MATT INCL. HARDENER

Application	Is a water based 2-component coating for finishing of parquet and wooden parquet, board- and plank floors where very high levels of resistance etc. and an ultra matt appearance is required.
Volume	5 liter incl. Hardener
Binder type	Polyurethane
Coverage	Approx. 10m ² /liter
Number of treatments	1-2
Floor temperature	15-25°
Drying time	Approx. 1-2 hours, 20°
Recommended tool	  






HIGH-LINE FC84 2K MATT INCL. HARDENER

Application	Is a water based 2-component coating for finishing of parquet and wooden parquet, board- and plank floors where very high levels of resistance etc. is required.
Volume	5 liter incl. Hardener
Binder type	Polyurethane
Coverage	Approx. 10m ² /liter
Number of treatments	1-2
Floor temperature	15-25°
Drying time	Approx. 1-2 hours, 20°
Recommended tool	  

HIGHLINE SPORT



HIGH-LINE 2K SPORT

Application	Waterbased 2-pack coating for finishing of sportsareas in wood parquet or planks, where extra high requirements are needed i.e. to abrasion resistance and friction. Fulfills requirements according to EN 14904.
Volume	5 Liter inclusive hardener
Binder type	Polyurethane
Coverage	Approx. 10m ² /liter
Number of treatments	1-2
Floor temperature	15-25
Drying time	Approx. 1-2 hours, 20° - 50% RH
Recommended tool	  



SPORT-LINE & Hardener

Colors	White, yellow, red, blue, green, black. Must be mixed with Hardener before use. The color rests 10 min. after mixing with the Hardener.
Hardener	1 part Hardener is added to 9 parts of Sport-Line



Lacquer Soap
for daily cleaning



Resin Remover
for removing handball resin



Defoamer
for floor washing machine

INDOOR CLIMATE CERTIFICATE

INDOOR AIR COMFORT CERTIFIED PRODUCT



This label combines all European regulations on VOC emissions from products into indoor air - just by copying together the most stringent legal requirements in any EU country into one label. A product labeled with Indoor Air Comfort will comply with the limit values as defined by any regulation across Europe.

The IAC certificate is assigned after a third party testing of the product in an emission chamber according to CEN/TS 16516, ISO 16000-11 and the emission is compared to national requirements.

Executive authority:
Eurofins Product Testing A/S
Smedskovvej 38
8464 Galten
Denmark
Tel. +45 70 22 42 76

ALLGEMEINEN BAUAUFSICHTLICHEN ZULASSUNG



ÜZ-logo is the visible sign that the product is approved under a National technical approval (abZ) and is the verification of fitness for use as a construction product. DIBt started granting them as early as 1968.

The abZ regulates those properties of the construction product that are of regulatory relevance as well as the fields of use and in some cases also the aspects related to processing, transport, storage, marking and confirmation of conformity. A construction technique permit may be included in the abZ if assembly, planning, design and execution are relevant for safe application.

For floor coatings the approval is based on an evaluation of the emission to indoor air of the product applied under use relevant conditions.

Executive authority:
Deutsches Institut für Bautechnik
Kolonnenstr. 30 B
D-10829 Berlin
Germany
Tel. +49 30 78730-0

FRENCH REQUIREMENTS



This French regulation limits and grades products emitting dangerous solvents or substances from decomposition of the product.

According to a third party testing of the emission from the product, the product is assigned a letter A, B, C or A+, which latter indicates the product meets all requirements in the regulation.

Executive authority:
French Agency for Food, Environmental and Occupational Health & Safety, France (ANSES)
14 rue Pierre et Marie Curie
94701 Maisons-Alfort Cedex
FRANCE
Tel. +33 (0) 1 49 77 13 50

DIM



Danish Indoor Climate Labeling is a voluntary labeling scheme for building materials, furniture and fixtures that requires third party documentation of the emission of dangerous substances at odor level.




The logo is the visible sign that the product complies with the requirements. Apart from a testing in an emission chamber, the testing includes a sensory evaluation of the odor emitted from the product and must be accepted by a certified panel of persons.




Executive authority:
Teknologisk Institut
Gregersensvej
DK-2630 Taastrup
Denmark
Tel. +45 72 20 20 00




FLOORCOAT




LYE



BASIC	
Application	All-round water-based primer, with short drying time. For new untreated or sanded wooden floors. Make intermediate sanding easy.
Volume	5 & 10 liter
Binder type	Polyurethane/Acrylic
Coverage	Approx. 10m ² /liter
Number of treatments	1
Floor temperature	15-25°
Drying time	Approx. 1-2 hours, 20°
Recommended tool	  

HIGH BASIC	
Application	All-round water based primer with an extra high solids content For new untreated or sanded wooden floors. Make intermediate sanding easy.
Volume	5 liter
Binder type	Polyurethane/Acrylic
Coverage	Approx. 10 m ² /liter
Number of treatments	1
Floor temperature	15-25°
Drying time	Approx. 1-2 hours, 20°
Recommended tool	  




FC HOME	
Application	Water-based polyurethane/acrylic topcoat. With short drying time and easy to intermediate sanding. Used where there is ordinary wear and tear in private homes and in housing associations. Available in gloss 10.
Volume	5 & 10 liter
Binder type	Polyurethane/Acrylic
Coverage	Approx. 10m ² /liter
Number of treatments	2-3
Floor temperature	15-25°
Drying time	Approx. 1-2 hours, 20°
Recommended tool	  

WHITE FINISH	
Application	EXTRA strong water-based polyurethane topcoat. Gives the floor a bright and modern look. Use: private homes, housing associations, offices etc.
Volume	5 liter
Binder type	Polyurethane
Coverage	Approx. 12m ² /liter
Number of treatments	2-4
Floor temperature	15-25°
Drying time	Approx. 2 hours, 20°
Recommended tool	  




FLOORCOAT LYE






SOLID

Application	EXTRA strong water-based polyurethane topcoat. With short drying time and easy to intermediate sanding Use: private homes, housing associations, offices etc. Available in gloss 15, 25 and 40
Volume	5 & 10 liter
Binder type	Polyurethane
Coverage	Approx. 10m ² /liter
Number of treatments	2-3
Floor temperature	15-25°
Drying time	Approx. 2 hours, 20°
Recommended tool	  




HIGH SOLID MATT

Application	Extra strong water-based polyurethane topcoat. With a very high solids content. Use: private home, housing associations, office etc.
Volume	5 liter
Binder type	Polyurethane
Coverage	Approx. 10m ² /liter
Number of treatments	2-3
Floor temperature	15-25°
Drying time	Approx. 2 hours, 20°
Recommended tool	  

UNIK 15

Application	EXTRA strong water-based polyurethane topcoat. With an extraordinary good chemical resistance. Use: private home, housing associations offices etc. Available in gloss 15
Volume	5 - 10 liter
Binder type	Polyurethane
Coverage	Approx. 10m ² /liter
Number of treatments	2-3
Floor temperature	15-25°
Drying time	Approx. 1- 2 hours, 20°
Recommended tool	  




UNIK 5 ULTRAMAT

Application	EXTRA strong water-based polyurethane topcoat. Ultra matt gives a beautifully oiled look. Use: private home, housing associations, offices, etc. Available in gloss 5.
Volume	5 liter
Binder type	Polyurethane
Coverage	Approx. 10m ² /liter
Number of treatments	2-3
Floor temperature	15-25°
Drying time	Approx. 2 hours, 20°
Recommended tool	  




FLOORCOAT OIL






NATURAL OIL

Application	Drying oil based on linseed oil, with high quality and high solids content. Can be used on all types of wood and gives the floor a warm glow
Volume	5 liter
Coverage	Approx. 10-20m ² /liter
Number of treatments	2-3
Floor temperature	15-25°
Drying time	Approx. 3 days, 20°
Recommended tool	  




MAINTENANCE OIL NATURAL

Application	Linseed oil-based maintenance oil to be used on previous natural oiled wooden floors.
Volume	5 liter
Coverage	Approx. 30-40m ² /liter
Number of treatments	1-2
Floor temperature	15-25°
Drying time	Approx. 1-2 days, 20°
Recommended tool	  

WHITE OIL

Application	White pigmented linseed oil-based wood oil in the same high quality as natural oil. Gives the floor a bright and modern look.
Volume	5 liter
Coverage	Approx. 10-20m ² /liter
Number of treatments	2-3
Floor temperature	15-25°
Drying time	Approx. 3 days, 20°
Recommended tool	  




MAINTENANCE OIL WHITE

Application	Linseed oil based maintenance oil for previously white oiled wooden floors.
Volume	5 liter
Coverage	Approx. 30-40m ² /liter
Number of treatments	1-2
Floor temperature	15-25°
Drying time	Approx. 1-2 days, 20°
Recommended tool	  




FLOORCOAT SOAP





NATURAL SOAP

Application	Made from the best raw materials and therefore very economical in use. The content of wax and resin makes the soap very suitable for polishing. The soap gives a natural look.
Volume	2,5 & 5 liter
Coverage	Approx. 20-40m ² /liter
Floor temperature	15-25°
Drying time	Approx. 2-4 hours, 20°
Recommended tool	  

WHITE SOAP

Application	Made from the best raw materials and therefore very economical in use. The content of wax and resin makes the soap very suitable for polishing. The soap gives a whitish look.
Volume	2,5 & 5 liter
Coverage	Approx. 20-40m ² /liter
Floor temperature	15-25°
Drying time	Approx. 2-4 hours, 20°
Recommended tool	  

LACQUER SOAP







Application	Used on indoor lacquered floors, cork, linoleum, tiles ect. An effective floor detergent that leaves a clean surface. The product does not leave a film to the floor and is very suitable for the newest mop systems.
Volume	2,5 liter
Coverage	Approx. 20-40m ² /liter
Floor temperature	15-25°
Drying time	Approx. 1-2 hours, 20°
PH	9 Ready mixed: 7
Recommended tool	 

FLOORCOAT





LYE







BORAT LYE

Application	White pigmented lye for all types of wood. Provides a light and fresh surface which can be overcoated, soap- or oil treated.
Volume	10 liter
Coverage	Approx. 5-10m ² /liter
Number of treatments	1-2
Floor temperature	15-25°
Drying time	Approx. 5 hours, 20°
Recommended tool	     





PRECOLOR WHITE

Application	White pigmented lye for all types of wood and can be coated with water-based lacquer, soap or oil treated. Very suitable for post-polishing.
Volume	10 liter
Coverage	Approx. 6-16m ² /liter
Number of treatments	1
Floor temperature	15-25°
Drying time	Approx. 5 hours, 20°
Recommended tool	   

HARDWOOD LYE

Application	White pigmented lye made from old original recipe. Used for hardwood, i.e. beech and oak.
Volume	10 liter
Coverage	Approx. 6-10m ² /liter
Number of treatments	1
Floor temperature	15-25°
Drying time	Approx. 5 hours, 20°
Recommended tool	   

SOFTWOOD LYE





Application	White pigmented lye made from old original recipe. Used for spruce and pine.
Volume	10 liter
Coverage	Approx. 6-10 m ² /liter
Number of treatments	1
Floor temperature	15-25°
Drying time	Approx. 5 hours, 20°
Recommended tool	   

FLOORCOAT





WAX & LYE







WAX LYE HARDWOOD NATURAL

Application	The product provide wood a natural look. Maintained with Floorcoat Natural Soap. Used for hardwood, i.e. beech and oak.
Volume	10 liter
Vokstype	Carnauba wax
Coverage	Approx. 6-10m ² /liter
Number of treatments	1-2
Floor temperature	15-25°
Drying time	Approx. 5 hours, 20°
Recommended tool	   





WAX LYE HARDWOOD WHITE


Application	The product provide wood a bright and fresh look. Maintained with Floorcoat Soap White. Used for hardwood, i.e. beech and oak.
Volume	10 liter
Vokstype	Carnauba wax
Coverage	Approx. 6-10m ² /liter
Number of treatments	1-2
Floor temperature	15-25°
Drying time	Approx. 5 hours, 20°
Recommended tool	   

WAX LYE SOFTWOOD NATURAL

Application	The product provide wood a natural look. Maintained with Floorcoat Natural Soap. Used for spruce and pine.
Volume	10 liter
Binder type	Carnauba wax
Coverage	Approx. 5-10m ² /liter
Number of treatments	1-2
Floor temperature	15-25°
Drying time	Approx. 5 hours, 20°
Recommended tool	   


WAX LYE SOFTWOOD WHITE

Application	The product provide wood a bright and fresh look. Maintained with Floorcoat Soap White. Used for spruce and pine.
Volume	10 liter
Binder type	Carnauba wax
Coverage	Approx. 5-10m ² /liter
Number of treatments	1-2
Floor temperature	15-25°
Drying time	Approx. 5 hours, 20°
Recommended tool	   

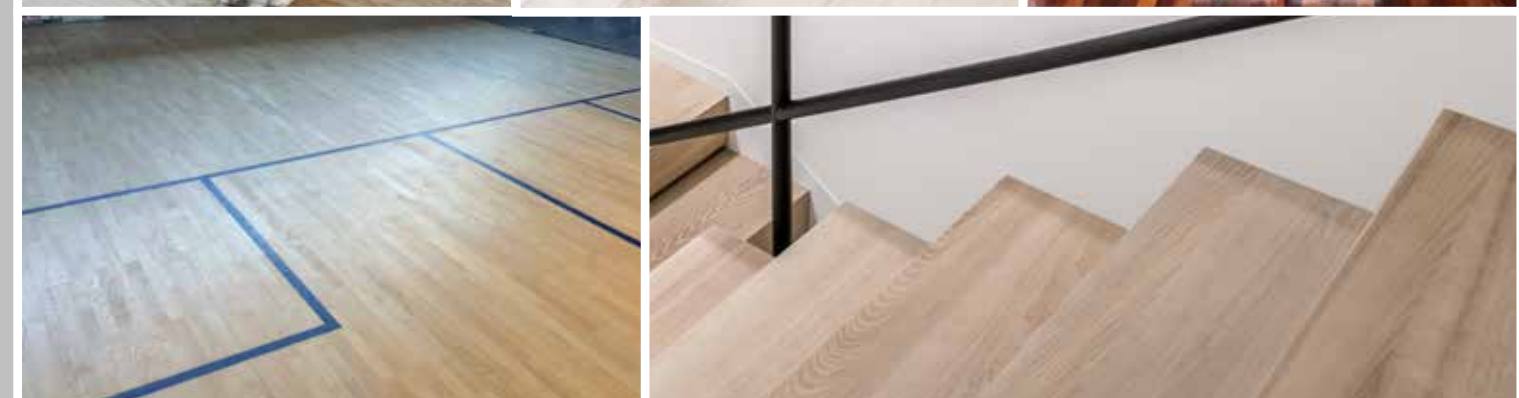

ABRASIVES

FOR PROFESSIONEL FLOOR SANDERS

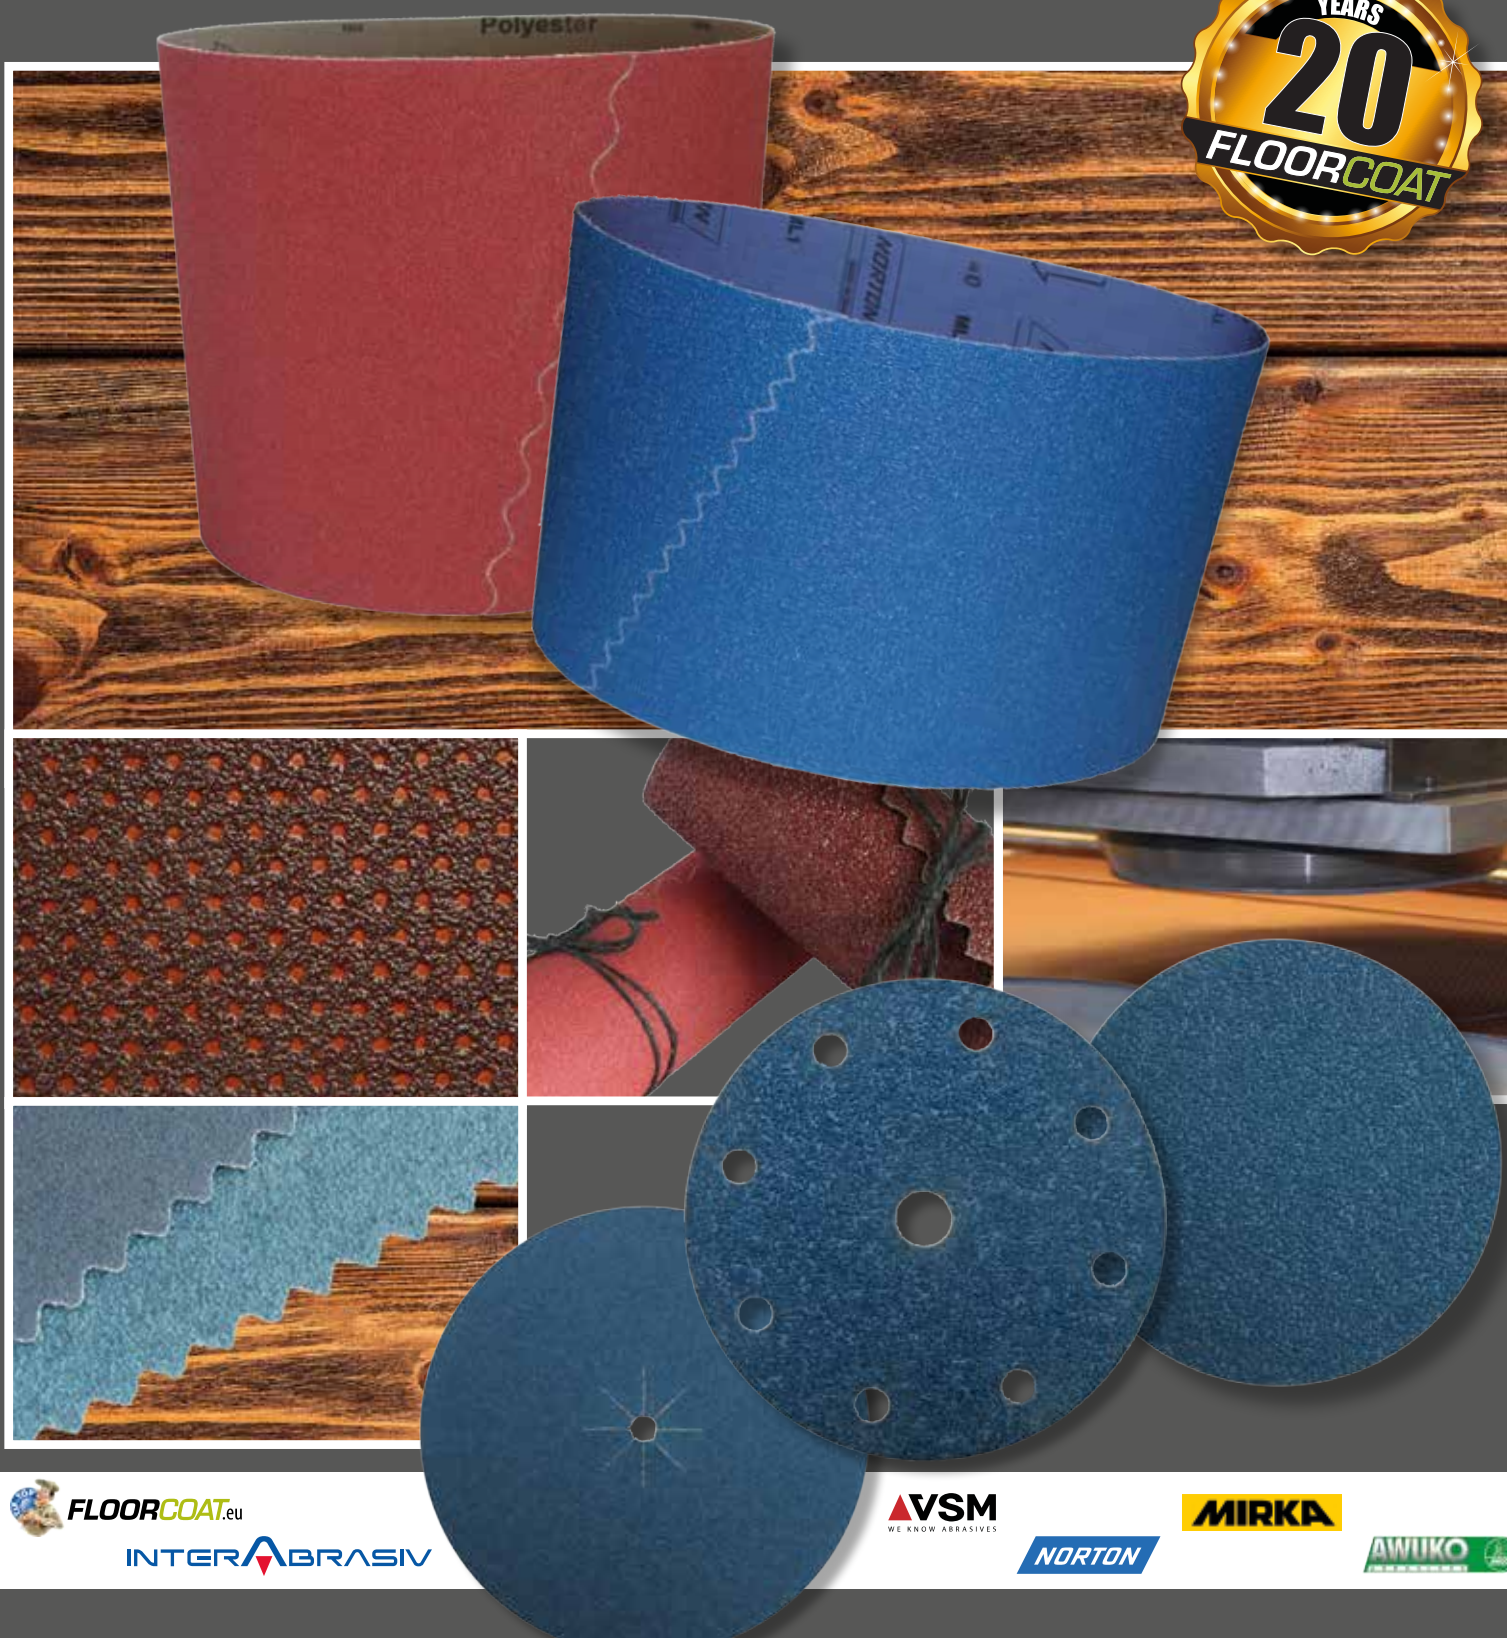

FLOORCOAT

ABRASIVE PRODUCT RANGE:

ZIRCONIA BELTSPAGE 2

**ALUMINIUM
OXIDE BELTS**PAGE 4

CERAMIC BELTSPAGE 5

ZIRCONIA DISCSPAGE 6

**TIP TOP ZIRCONIA
COTTON CLOTH DISCS**PAGE 7

**HIGH CERAMIC
VELCRO DISCS**PAGE 8

ULTIMAX DISCSPAGE 9

**SILICON CARBIDE
DISCS**PAGE 12

FIBER DISCSPAGE 13

SANDING SCREENSPAGE 14

PADSPAGE 15

**DUET/
SUPERPADS DISCS**PAGE 16

ROLLSPAGE 17

ROLLS PAPERPAGE 19

Here you'll find us:

DENMARK/Odense
TIP TOP Slibematerialer A/S
Egestubben 4 C & D
5270 Odense N – Danmark
T. +45 66 18 03 06
info@floorcoat.dk

DENMARK/Århus
TIP TOP Slibematerialer A/S
Egsagervej 8
8230 Åbyhøj – Danmark
T. +45 86 12 13 66
info@floorcoat.dk

NORWAY
TIP TOP Slipematerialer AS
Norge Henting av varer Oslo:
Jims Lagerutsalg
Brokekkveien 1028
0582 Oslo - Norge
T. +47 22 65 45 43
info@floorcoat.no

NETHERLANDS
TIP TOP Schuurmaterialen B.V.
Kollergang 15A/B
7773 NG Hardenberg - Netherlands
T. +31 6 1312 6929
info@floorcoat.nl

SWEDEN
Floorcoat Sverige AB
Industrigatan 25
234 35 Lomma
+46 (0) 40 29 33 10
info@floorcoat.se

GERMANY
Floorcoat A/S
Egestubben 4 C & D
5270 Odense N
Contact: Bo Blak Abildgaard
T. +45 28 11 64 70
info@floorcoat.dk

www.floorcoat.eu

FLOORCOAT

ABRASIVES




Tip Top Slibematerialer is a company that converts quality abrasive materials into solutions for professional floor sanders throughout Europe.

Due to our in-house conversion, our delivery reliability is 100% and the quality from top professional suppliers means we cover every grinding task.




ZIRKON BAND

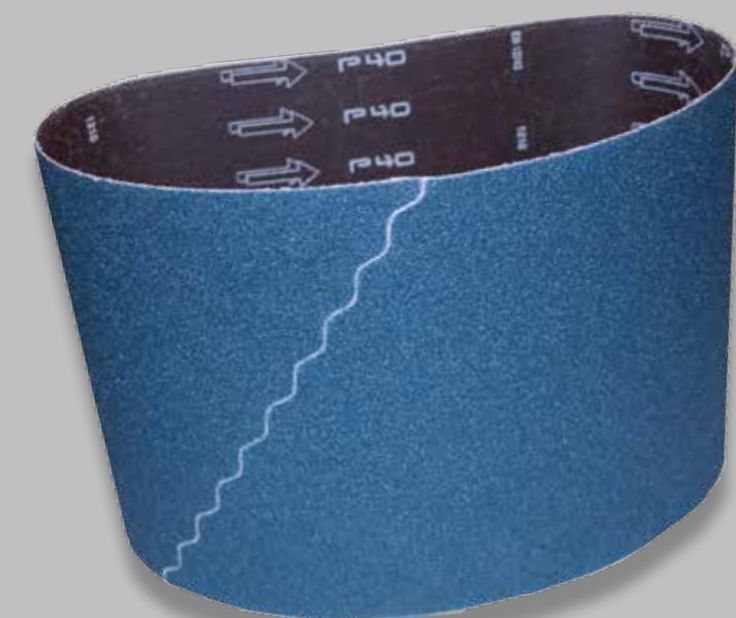

TIP TOP ZIRKON BAND

Detaljer	Kraftig polyesterrygg med fingerlockning
Dimension	200x750 / 250x750
Korn	16, 24, 36, 40, 60, 80, 100, 120
Antal i kartong	10

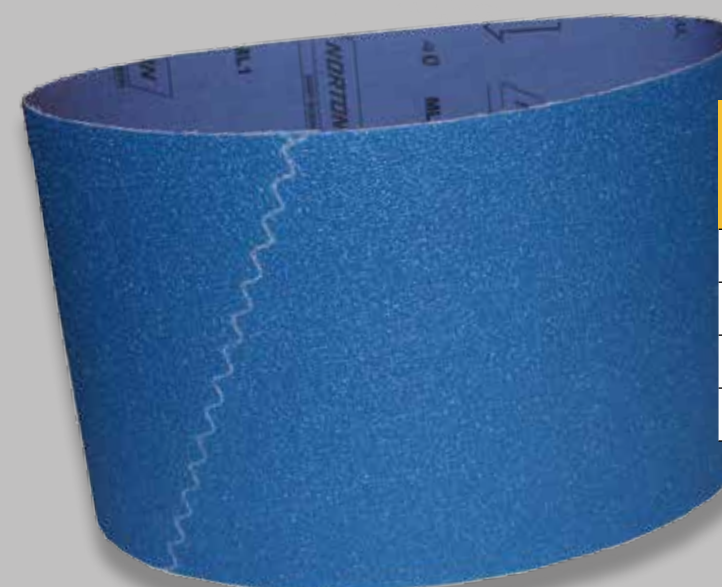


NORTON BLÅ ZIRKON BAND

Detaljer	Kraftfull kanvasrygg med fingerlocking
Dimension	200x750 / 250x750
Korn	24, 36, 40, 60, 80, 100, 120
Antal i kartong	10




TIP TOP ZIRKON BAND EXTRA HÖG KVALITET

Detaljer	Kraftig polyesterrygg med fingerlockning
Dimension	200x750 / 250x750
Korn	24, 36, 40, 60, 80, 100, 120
Antal i kartong	10

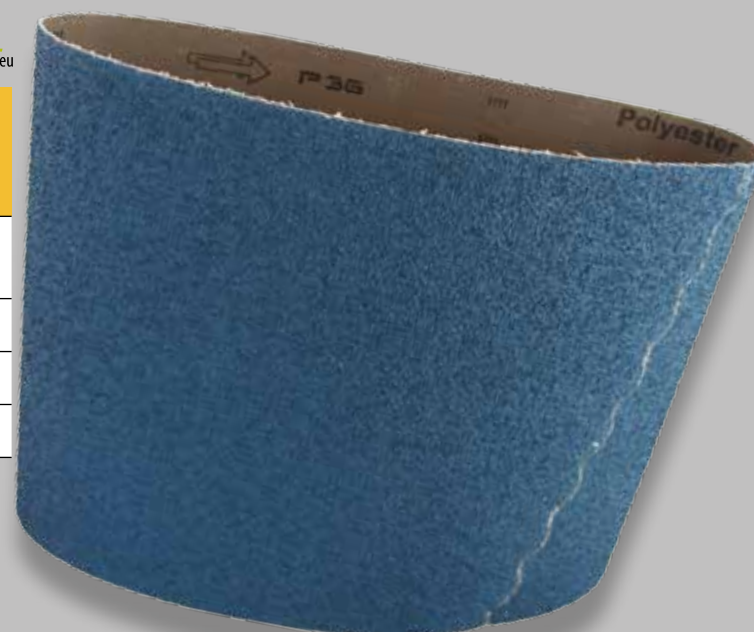

AWUKO BLÅ ZIRKON BAND

Detaljer	Kraftfull kanvasrygg med fingerlocking
Dimension	200x750 / 250x750
Korn	24, 36, 40, 60, 80, 100, 120
Antal i kartong	10

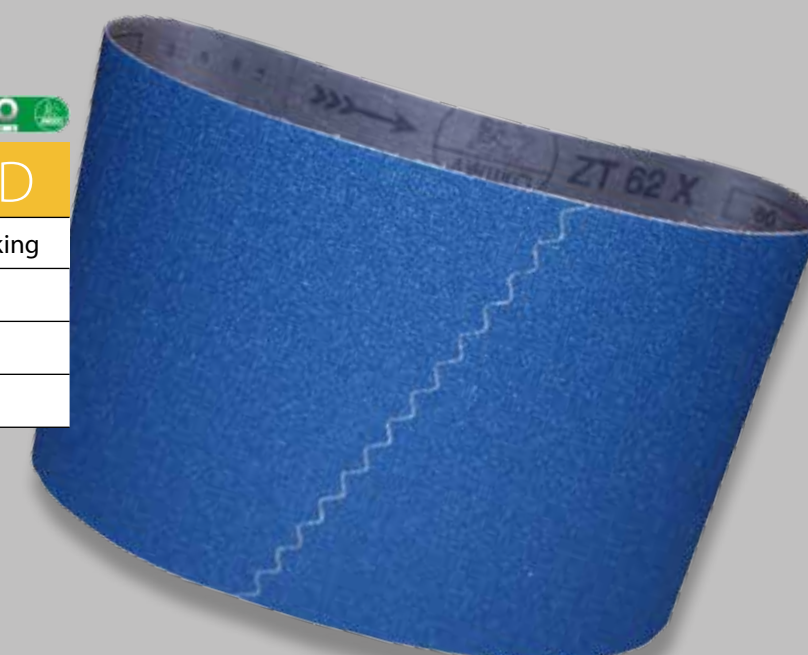

ALUMINIUM OXID BAND

CERAMIC BAND




AWUKO ALU BAND

Detaljer	Aluminiumoxid behandlat band. Kraftfull kanvasrygg med fingerlocking.
Dimension	200x551 200x750 250x750
Korn	200x551: 16, 24, 36, 40, 60, 80, 100, 120 200x750 & 250x750: 16, 24, 36, 40, 50, 60, 80, 100, 120, 150
Antal i kartong	10



VSM CERAMIC BAND

Detaljer	Slipsystem med självslipande keramiska korn. Ger snabbare och svalare slipning. Speciellt lämpligt för hårda träslag.
Dimension	200x750 / 250x750
Korn	24, 36, 40, 50, 60, 80, 100, 120
Antal i kartong	10

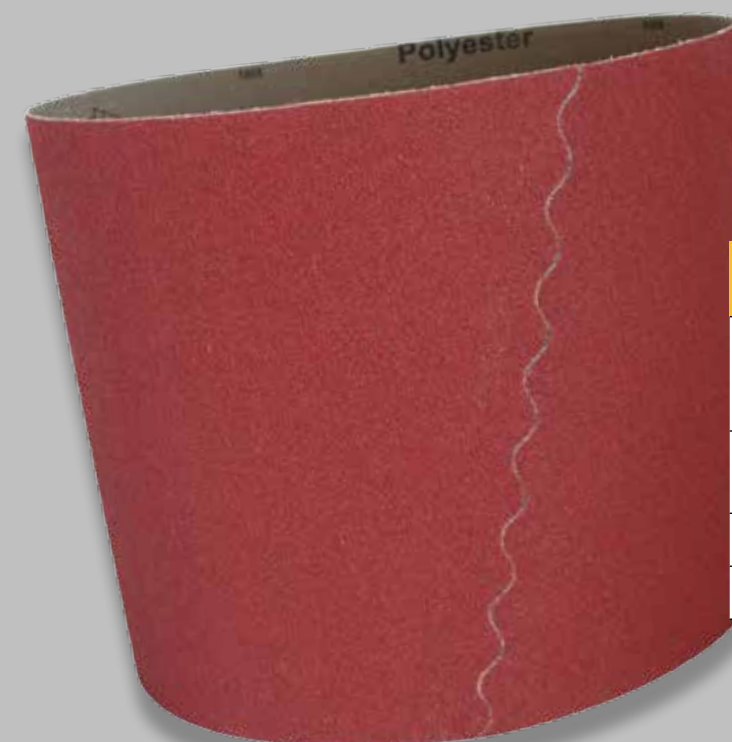

HIGH CERAMIC BAND

Detaljer	Slipsystem med självslipande keramiska korn. Ger snabbare och svalare slipning. Speciellt lämpligt för hårda träslag.
Dimension	200x750 250x750
Korn	24, 36, 40, 50, 60, 80, 100, 120
Antal i kartong	10

ZIRKON RONDELL

NORTON

NORTON ZIRKON VELCRO RONDELL

Detaljer	Velcro – kraftig kanvasrygg
Dimension	150, 175, 178 & 180mm
Korn	24, 36, 40, 50, 60, 80, 100, 120

NORTON

NORTON ZIRKON VELCRO RONDELL m. centerhål

Detaljer	Velcro – kraftig kanvasrygg
Dimension	178x22mm
Korn	24, 36, 40, 50, 60, 80, 100, 120

NORTON

NORTON BLUE FIRE - VELCRO RONDELL 9 hål

Detaljer	Zirkon/Velcro på kraftig papper med 9 hål till Festool
Dimension	150mm
Korn	40, 60, 80, 120

TIP TOP ZIRKON RONDELL

TIP TOP ZIRKON VELCRO RONDELL

Detaljer	Velcro – kraftig kanvasrygg
Dimension	150, 175 & 178mm
Korn	16, 24, 36, 40, 50, 60, 80, 100, 120

FLOORCOAT.eu

TIP TOP ZIRKON VELCRO RONDELL m. centerhål

Detaljer	Velcro – kraftig kanvasrygg
Dimension	178x10mm & 150x10mm
Korn	16, 24, 36, 40, 50, 60, 80, 100, 120

FLOORCOAT.eu

TIP TOP ZIRKON VELCRO RONDELL 9 hål

Detaljer	Zirkon/Velcro på kraftig papper med 9 hål till Festool
Dimension	150mm
Korn	24, 36, 40, 50, 60, 80, 100, 120

FLOORCOAT.eu

HIGH CERAMIC VELCRO RONDELL



TIP TOP HIGH CERAMIC VELCRO RONDELL

Detaljer	kraftig kanvasrygg
Dimension	150 & 178mm
Korn	24, 36, 40, 50, 60, 80, 100, 120



TIP TOP HIGH CERAMIC VELCRO RONDELL 9 hål

Detaljer	kraftig kanvasrygg
Dimension	150mm med 9 hål
Korn	40, 50, 60, 80, 100, 120

ULTIMAX RONDELL



ULTIMAX VELCRO RONDELL

Detaljer	Velcro på papper
Dimension	150, 175, 178, 178x22, 200, 230
Korn	40, 60, 80, 100, 120, 150



ULTIMAX VELCRO RONDELL 9 hål

Detaljer	Velcro på papper
Dimension	150mm med 9 hål
Korn	40, 60, 80, 100, 120, 150

ULTIMAX RONDELL

MIRKA

ULTIMAX VELCRO RONDEL 15 hål

Detaljer	Velcro på papper
Dimension	150 mm med 15 hål
Korn	40, 60, 80, 100, 120, 150

MIRKA

ULTIMAX VELCRO RONDELL 17 hål

Detaljer	Velcro på papper
Dimension	150 mm med 17 hål
Korn	40, 60, 80, 100, 120, 150

MIRKA

ULTIMAX VELCRO RONDELL 7 hål

Detaljer	Velcro på papper
Dimension	90mm med 7 håller
Korn	40, 60, 80, 100, 120, 150

ULTIMAX RONDELL

MIRKA

ULTIMAX VELCRO RONDELL 8 hål

Detaljer	Velcro på papper
Dimension	125 mm med 8 håller
Korn	40, 60, 80, 100, 120, 150

MIRKA

ULTIMAX VELCRO DELTA

Detaljer	Velcro på papper
Dimension	87x87 mm
Korn	40, 60, 80, 100, 120, 150

MIRKA

ULTIMAX VELCRO DELTA

Detaljer	Velcro på papper
Dimension	93x93 mm
Korn	40, 60, 80, 100, 120, 150

SILICIUM RONDELL



TIP TOP SILICIUM VELCRO RONDELL

Detaljer	Velcro papper
Dimension	150, 175 & 180mm
Korn	16, 24, 36, 40, 50, 60, 80, 100, 120,



TIP TOP SILICIUM RONDELL m. centerhål

Detaljer	Papper
Dimension	150x22mm & 175x22mm 178x22mm & 180x22mm
Korn	16, 24, 36, 40, 50, 60, 80



FIBER RONDELL






TIP TOP ALU FIBER RONDELL

Detaljer	Fiber
Dimension	150x22mm & 180x22mm
Korn	16, 24, 36, 40, 50, 60, 80

TIP TOP ZIRKON FIBER RONDELL

Detaljer	Fiber
Dimension	180x22mm
Korn	24, 36, 40, 50, 60, 80

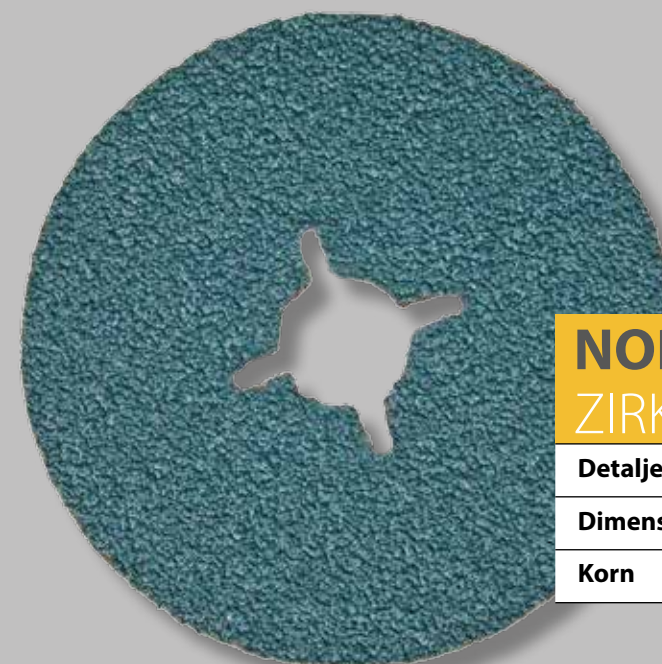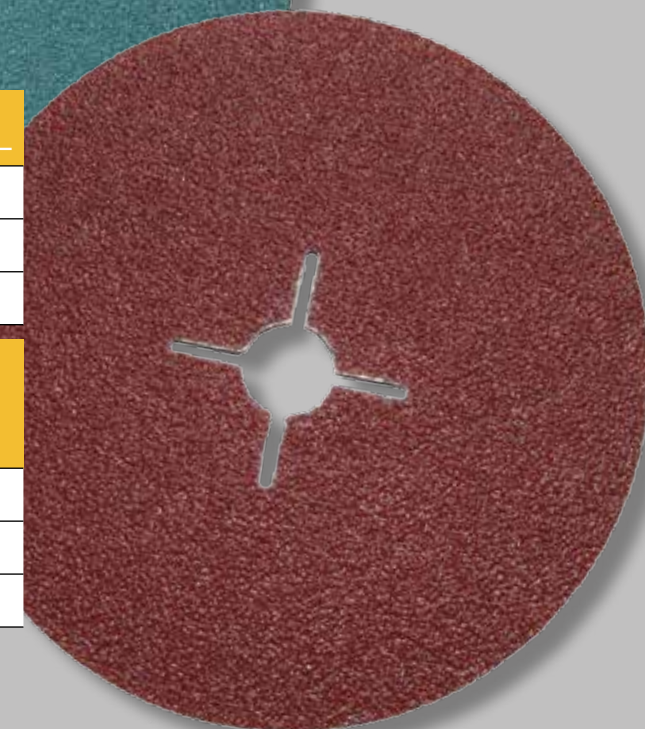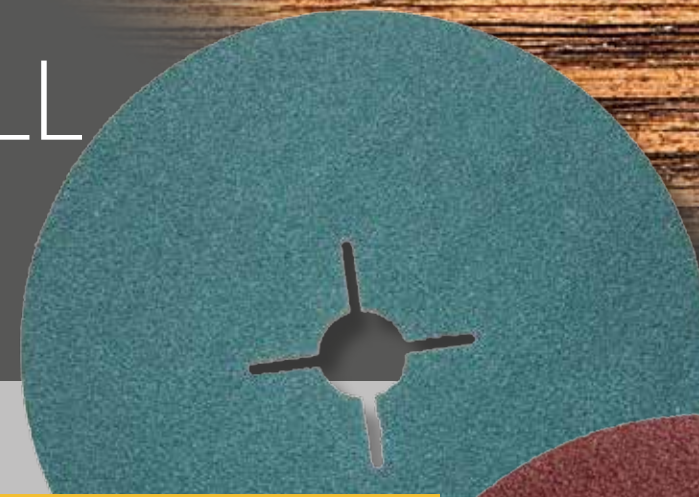

NORTON

NORTON ZIRKON FIBER RONDELL

Detaljer	Fiber
Dimension	115x22mm
Korn	24, 36, 40, 50, 60, 80, 100, 120

SLIPNÄT

GOLVPADS



NORTON


NORTON SLIPNÄT

Dimension	330, 410 & 430mm
Korn	60, 80, 100, 120, 150, 180

AWUKO

AWUKO SLIPNÄT

Dimension	410
Korn	60, 80, 100, 120, 150, 180

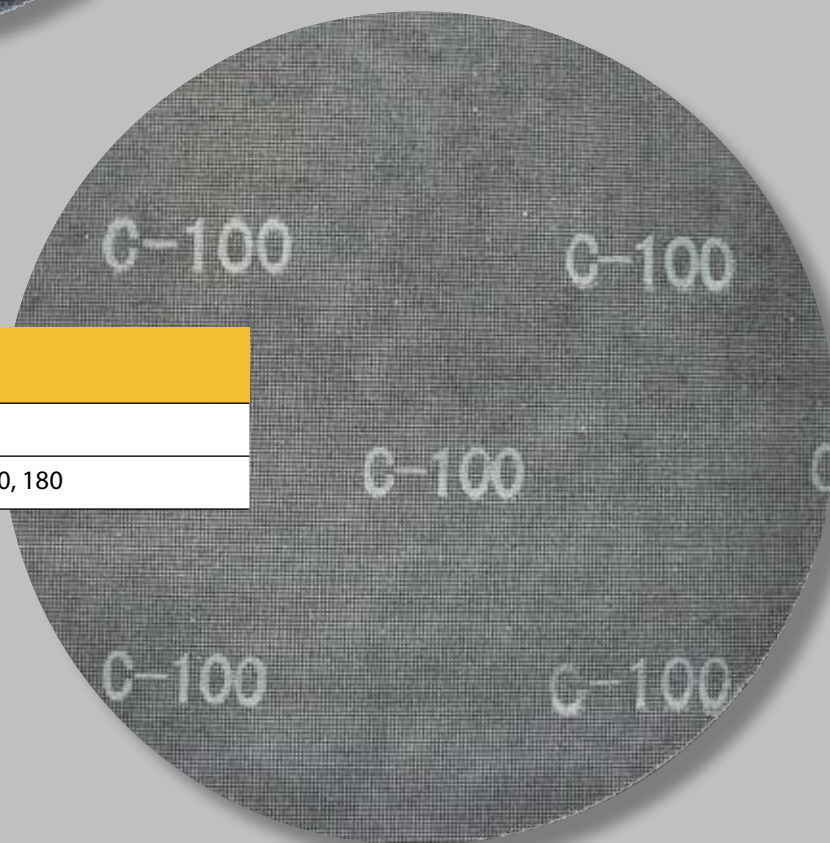

PADS

13"	Vit, röd, svart
Dimension	25mm
16"	Vit, röd, beige, grön brun och svart
Dimension	8 & 25mm
17"	Vit, röd, beige, grön brun och svart
Dimension	8 & 25mm

Oljepads Maroon

Dimension	410mm
------------------	-------

MIRKA

ABRALON

Dimension	410mm
Korn	500



DUET/ SUPERPADS DISC




DUET 410MM DUBBELSIDIG SILICIUM

Dimension	410x22mm
Korn	16, 24, 36, 40



SUPERPAD DISCS

Dimension	410mm
Korn	60, 80, 100, 120, 150, 180, 220


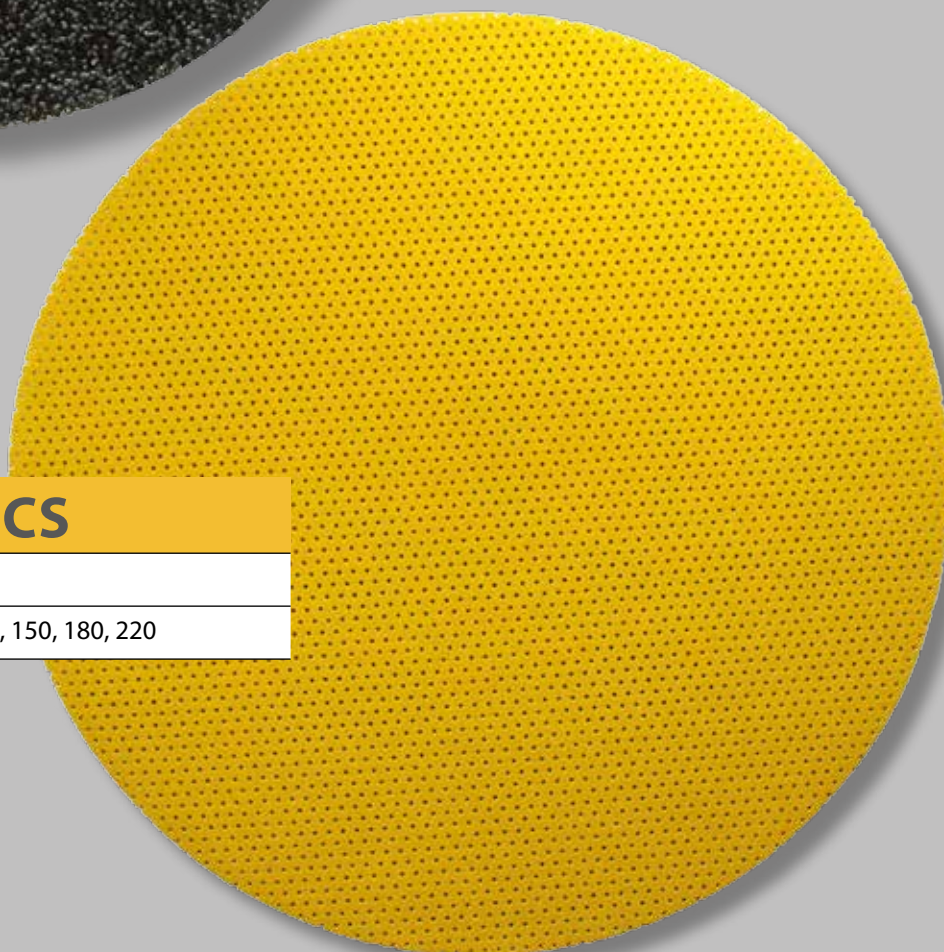


RULLAR



TIP TOP ZIRKON POLYESTER RULLAR

Detaljer	Kraftig polyester
Dimension	250x50m
Korn	16, 24, 36, 40, 50, 60, 80, 100, 120

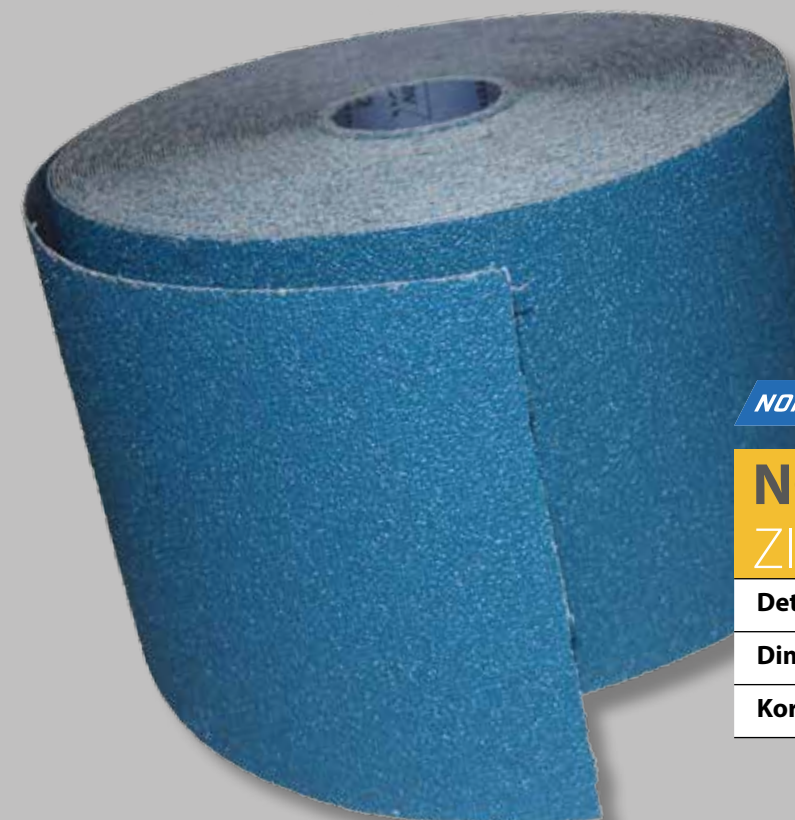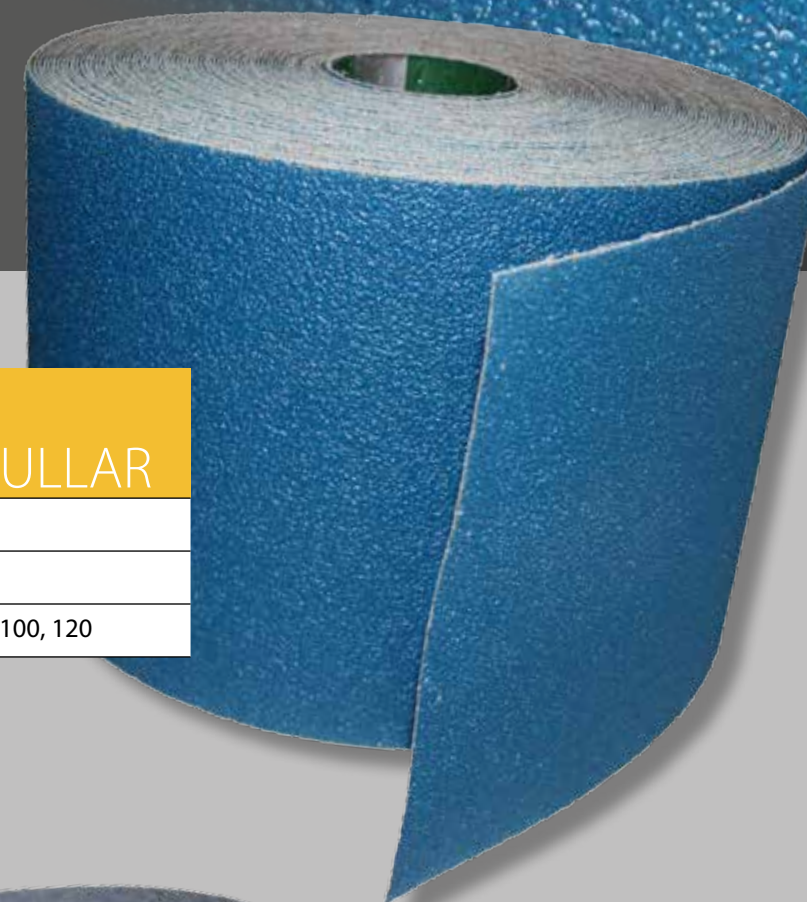

NORTON ZIRKON KANVAS RULLAR


Detaljer	Kraftig kanvasrygg
Dimension	250x50m
Korn	24, 36, 40, 50, 60, 80, 100, 120

RULLAR



AWUKO ZIRKON RULLAR

Detaljer	Kraftig kanvasrygg
Dimension	250x50m
Korn	24, 36, 40, 60, 80, 100, 120

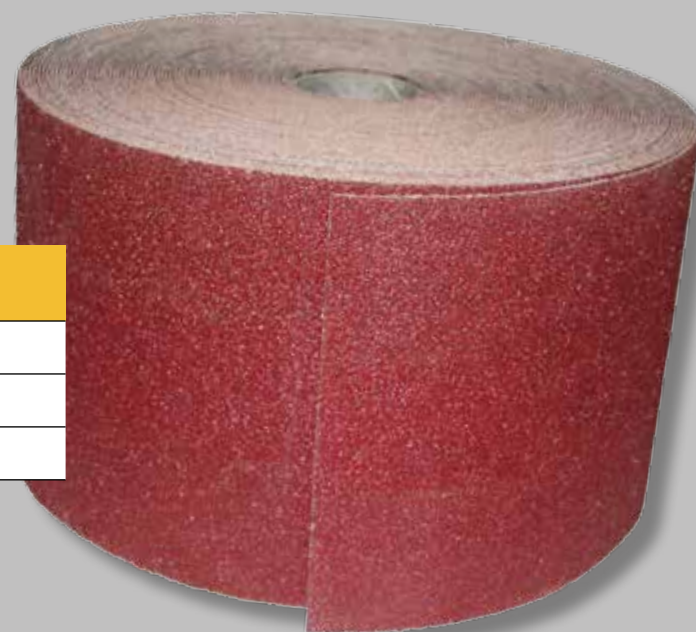

VSM CERAMIC RULLAR

Detaljer	Kraftig kanvasrygg
Dimension	250x50m
Korn	24, 36, 40, 50, 60, 80, 100, 120

RULLAR PAPPER



TIP TOP PAPPER RULLAR

Detaljer	Papper sliprullar
Dimension	254x25m & 254x50m
Korn	254x25m: 16, 24 254x50m: 36, 40, 50, 60, 80, 100, 120