Technical Datasheet

FC Home Decking Oil

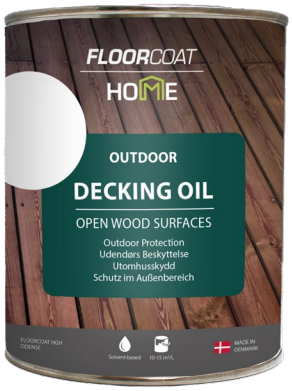

Description:
FC Home Decking Oil is intended for outdoor treatment and maintenance of new and previously oiled wooden terraces and garden furniture. Suitable for use on all wood species, however caution is advised when using on larch wood.

The composition of the oil protects the wood by providing strong water and dirt repellence, as well as an easy-to-clean surface that helps delay the growth of algae and mould. The oil contains UV protection.

Product data:

- **Colour:** Clear, Chocolate, Medium Walnut
- **Packaging:** 1 L + 3 L
- **Application:** Roller
- **Coverage:** Approx. 10–15 m^2/L, depending on the wood species
- **Storage:** Store above 5°C and below 30°C. Protect from frost and direct sunlight.
- **Temperature:** Max. +30°C, avoid direct sunlight
- **Shelf Life:** 12 months unopened, stored frost-free
- **Product Type:** Alkyd oil binder
- **Cleaning:** Mineral turpentine (white spirit)
- **Safety:** See the product Safety Data Sheet (SDS).

Instructions for Use:

Both new and previously treated wooden terraces and garden furniture must be cleaned with FC Home Exterior Cleaner before oiling. After the cleaning process, and once the wood is completely dry after a minimum of 24 hours, sanding with fine sandpaper grit 120 or machine sanding may be necessary before oiling, especially if fibres have raised or if the wood has not been fully cleaned.

The treatment must be carried out in dry weather and at a minimum temperature of 10°C. Avoid direct sunlight and excessive heat. Stir the oil thoroughly before use. After cleaning, treat the surface with FC Home Decking Oil in the desired colour. Apply the oil with a roller or brush in a thin, even layer following the direction of the wood grain.

The applied oil must not dry for more than 10 minutes before buffing. Remove all excess oil using a polishing machine with a white or beige pad. Alternatively, wipe off the oil with a lint-free cotton cloth until all excess oil has been removed and the surface appears uniform.

Please Note:

Coloured surfaces may transfer slight colour during the first few days. Always test the oil on an inconspicuous area to evaluate colour and appearance. All cloths and application materials must be collected in a bag containing a small amount of water and disposed of after the working day. Alternatively, they must be stored in a fireproof container with a lid to eliminate the risk of self-ignition.

Ready for Use:

Careful use after 1–2 days depending on weather conditions and temperature.

Disclaimer:
The information in this document, as well as all other references and recommendations provided in connection with advice regarding the use of our products, is based on experience and standard conditions. Due to the many possible applications and processing conditions, the user is not relieved of the responsibility to carry out their own tests or seek technical advice from the dealer or manufacturer.

No guarantee is given for the workmanship carried out using our products, and documentation of such workmanship is the responsibility of the performing contractor. Undesirable effects may occur during recoating, even if the work is carried out according to proper craftsmanship standards. It is recommended that the contractor takes this into consideration in relation to the customer where necessary.

The manufacturer's recommendations and any applicable standards must be followed. Our liability and obligations are governed by our general terms and conditions and are not extended by this information or our advice. When new technical information becomes available, previous versions become invalid.

Revised: 2026-05-20